

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Menu A/S

Supplier's address: PD, Aarhusgade 130, 2150 Copenhagen Nordhavn, DK

Model identifier: 1506059 Hashira Wall Off-White

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Pin		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	108 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,466 0,405
Parameters for LED and OLED light sources:				
R9 colour rendering index value	41		Survival factor	-
the lumen maintenance factor	-			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,00		Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a): not applicable;


(b): not applicable;

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-800nm
Test Mode : Fast Test

RH : 65.0%
IP : 51907 (79%)
T : 3974 ms
Sensitivity : High

Spectrum

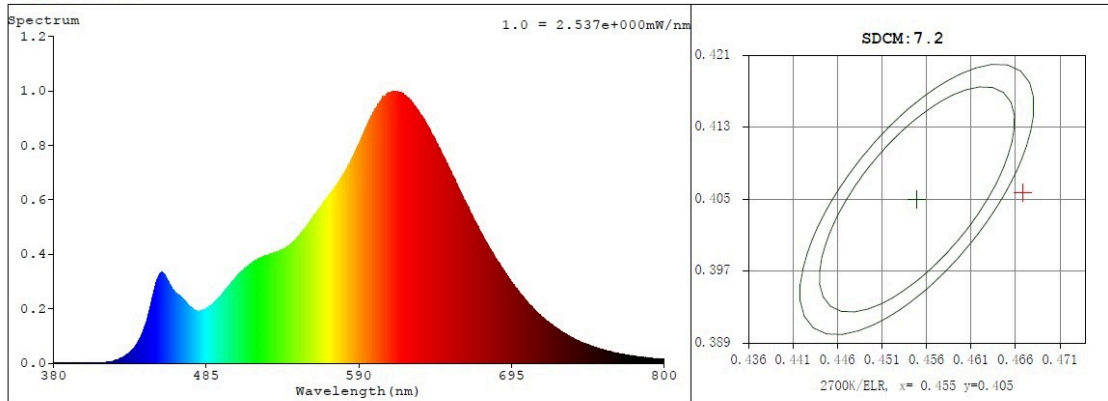

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4669$ $y = 0.4058$ / $u' = 0.2693$ $v' = 0.5265$ ($duv = -2.27e-03$) $Dx, Dy: -0.0042, -0.0070$

CCT= 2568K Prcp WL: $L_d = 585.7nm$ Purity=61.9%

Peak WL: $L_p = 617nm$ FWHM: =118.7nm Ratio: R=27.8% G=69.6% B=2.6%

Render Index: $R_a = 89.6$

R1 =92 R2 =99 R3 =93 R4 =90 R5 =93 R6 =95 R7 =85
R8 =71 R9 =41 R10=97 R11=92 R12=87 R13=94 R14=97 R15=85